16X30 LEAN-TO SHED PLAN

FREE PREVIEW | Footprint 16 x 30 ft (480 sq ft)



Get the full 16x30 lean-to plan

75 pages: material list, cut list, every measurement and a drawing for each step, from the skids to the shingles. Instant PDF download.

$19.99 one time | 30-day money-back guarantee

Get the full plan

3dshedplans.com/16x30-lean-to-shed-plan/

Copyright 2026 3DSHEDPLANS.COM. 16x30 lean-to shed plan, free preview. Page 1

Look inside the full plan

Real pages from the 75-page 16x30 lean-to plan. The free preview shows the shape of the build; the full plan gives you the numbers to buy and cut once.

FULL PLAN

Foundation and floor: item	Qty	Used for
Pressure-treated 4x4 x 8 ft, ground contact (UC4A or higher)	3	Skid (3 pieces @ 7' 9 15/16")
Floor decking: sheet 4x8 3/4 T&G plywood	16	Floor deck: the lettered pieces on the decking map (step Floor decking)


Front wall

Front wall: item	Qty	Used for
2x4 x 10 ft	28	Front wall plate (2 pieces @ 9' 8 3/4"); Front wall plate (2 pieces @ 9' 4"); Front wall stud (24 @ 9' 5 5/8")
2x4 x 12 ft	2	Front wall plate (2 pieces @ 10' 11 1/4")
2x4 x 14 ft	2	Front cripple (5 @ 2' 5 7/8"); Front trimmer (2 @ 6' 4 1/2")
2x4 x 16 ft	2	Front wall cap plate (2 pieces @ 15' 0")
2x8 x 14 ft	1	Front header (2x8 doubled + 1/2 ply) (2 @ 6' 3")
Front wall: 1/2 in plywood for the header fillers (sheet 1 of the plywood rip map; keep the rest of it for the soffit strips): sheet 4x8 1/2 plywood	1	Header fillers first (sheet 1 of the plywood rip map), the rest of the sheet for soffit strips
Front header filler: 1/2 plywood strip 2x8 deep, 6' 3" long		Not b… …p it from the 1/2 in plywood sheet on this list (sheet 1 of the plywood rip map)

Material list

Every board, sheet and fastener with quantities. Continues in the full plan.

FULL PLAN

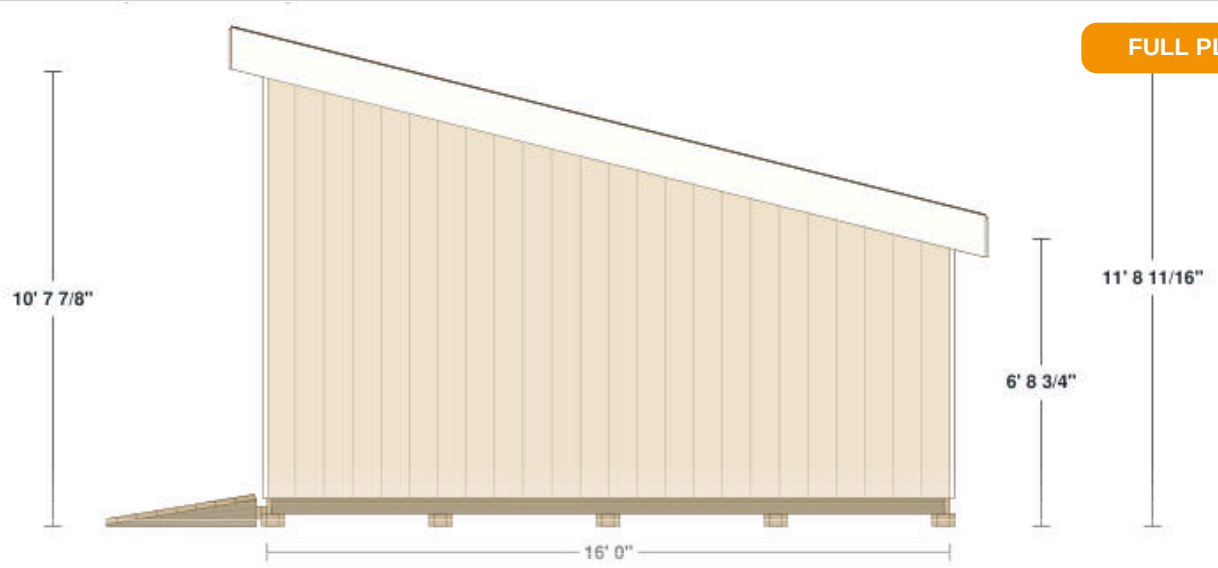

BACK ELEVATION

Every measurement

Front, side and back views with dimensions, then one drawing per step.

Get the full plan $19.99

3dshedplans.com/16x30-lean-to-shed-plan/


Copyright 2026 3DSHEDPLANS.COM. 16x30 lean-to shed plan, free preview. Page 2


Before you start

Shed rules (size limits, height, setbacks, permits) vary by town and HOA. Check your local permit office before you build.

Safety: wear eye and ear protection, keep blades sharp and guards on, work from stable ladders with a helper, and stay off open rafters.

This free version walks through the five stages of the 16x30 lean-to shed plan with views from the full plan. Below: the finished shed from the front and from the back.

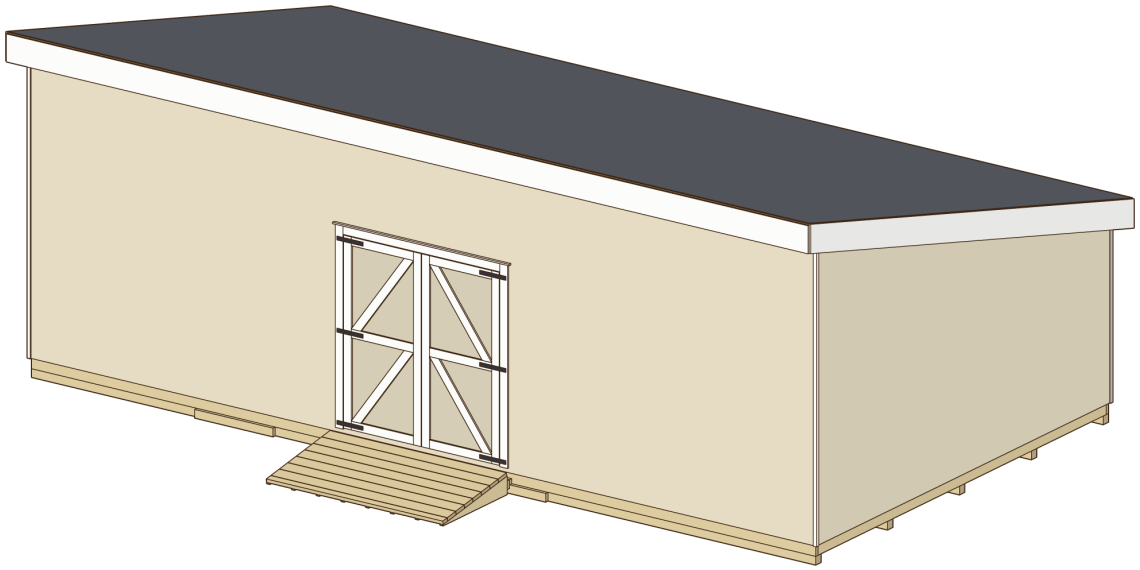


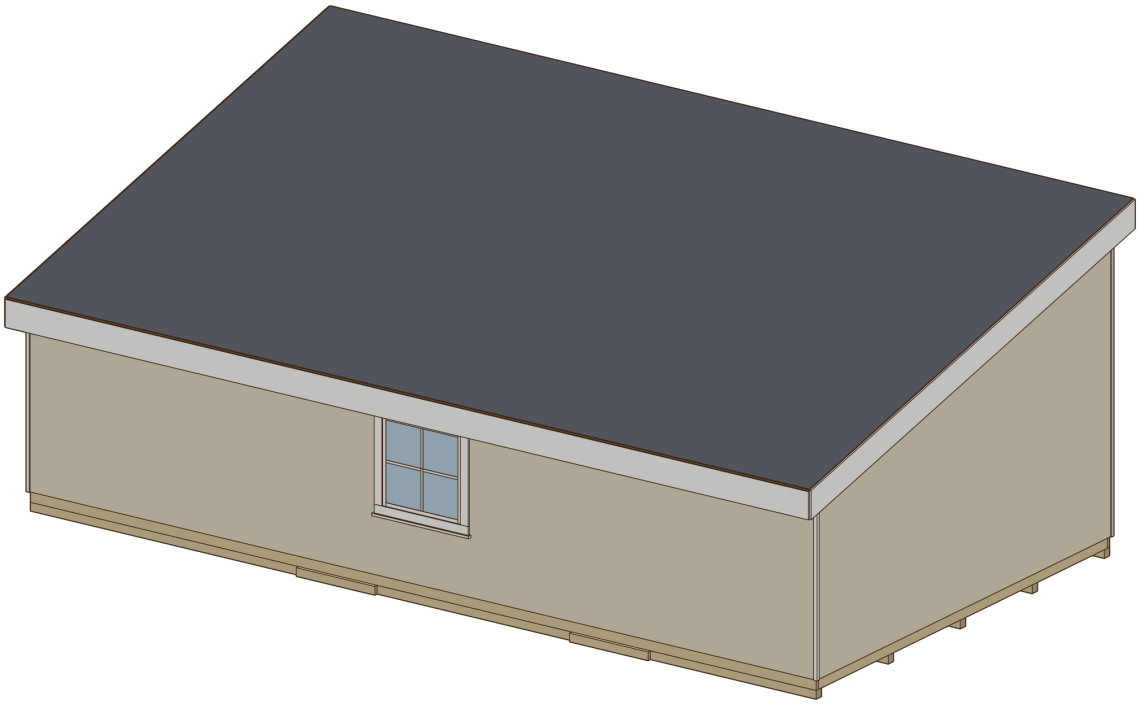

Full 16x30 lean-to plan: material list, cut list, every measurement | $19.99 | 3dshedplans.com/16x30-lean-to-shed-plan/

1 SITE AND FOUNDATION


Clear and level the site, lay a compacted gravel pad inside a pressure-treated 4x6 frame and set the pressure-treated 4x4 skids level in both directions.

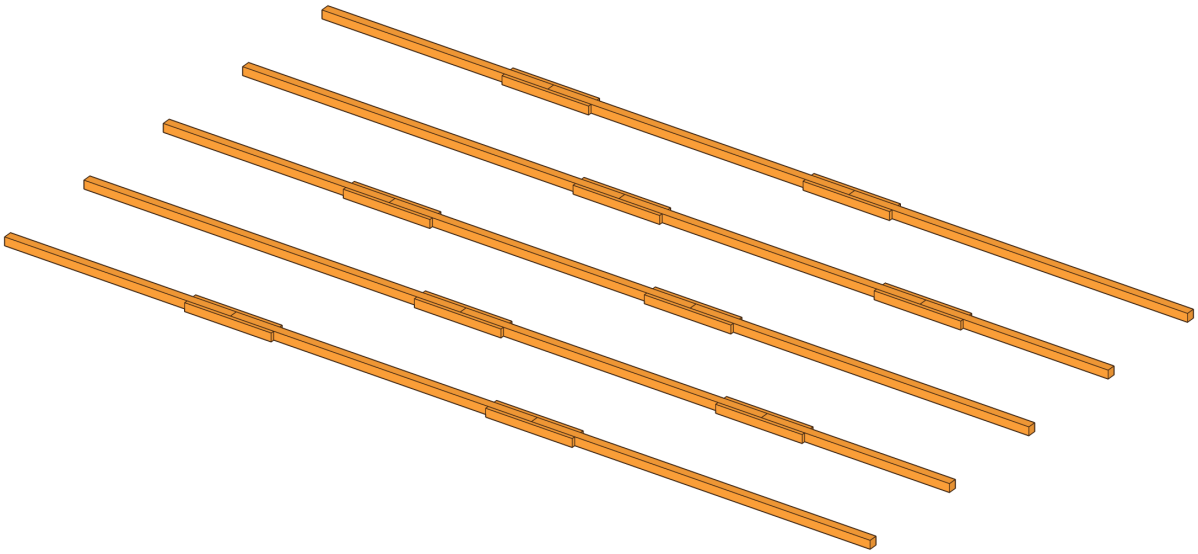

2 FLOOR FRAME AND DECK

Build the floor frame from pressure-treated 2x6 rim joists and joists about 15 5/8 in on center, square it, fix it to the skids, and glue and screw 3/4 in tongue and groove plywood on top.

In the full plan: the site layout with its diagonals, skid spacing, the joist marks on the rims and a piece map for every decking sheet. www.3dshedplans.com/16x30-lean-to-shed-plan/

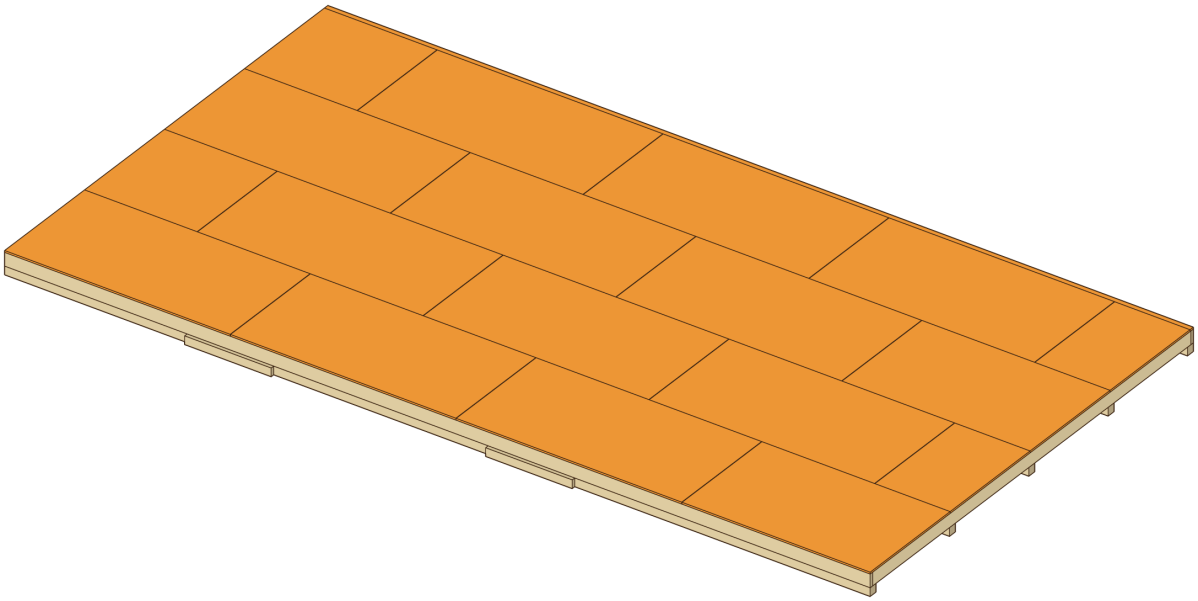



Full 16x30 lean-to plan: material list, cut list, every measurement | $19.99 | 3dshedplans.com/16x30-lean-to-shed-plan/

3 WALLS

Frame a tall front wall with the door, a low back wall with the window, and two side walls whose tops follow the roof slope, all with 2x4 studs 16 in on center or closer. Square each one, raise it as a bare frame with a helper (tall front wall first), brace it plumb, and tie the corners together. Then hang the T1-11 siding and build the double door from T1-11 with a 1x4 frame and two Z braces on each leaf, then hang it on T-strap hinges inside a 1x4 casing.

In the full plan: every wall drawn stud by stud with a position table, the headers, the siding sheet layouts, the door leaf with its frame and brace cuts and how to raise each wall safely.
www.3dshedplans.com/16x30-lean-to-shed-plan/

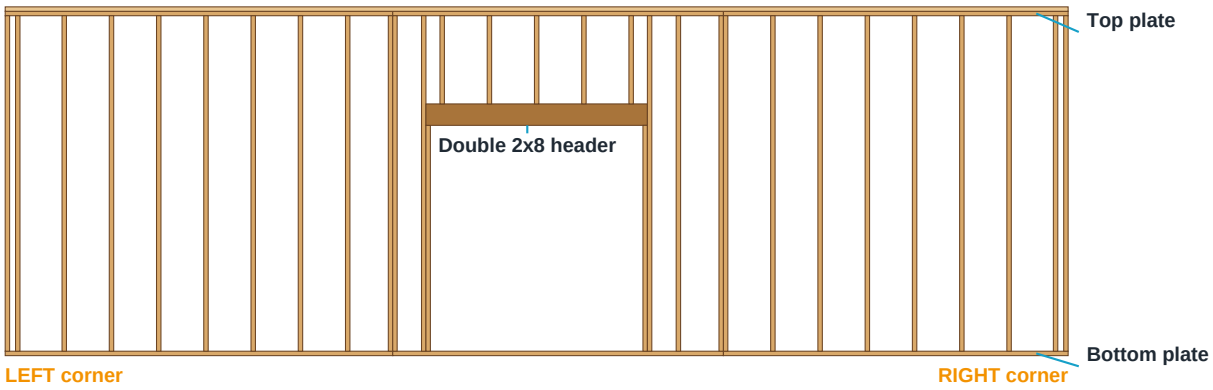

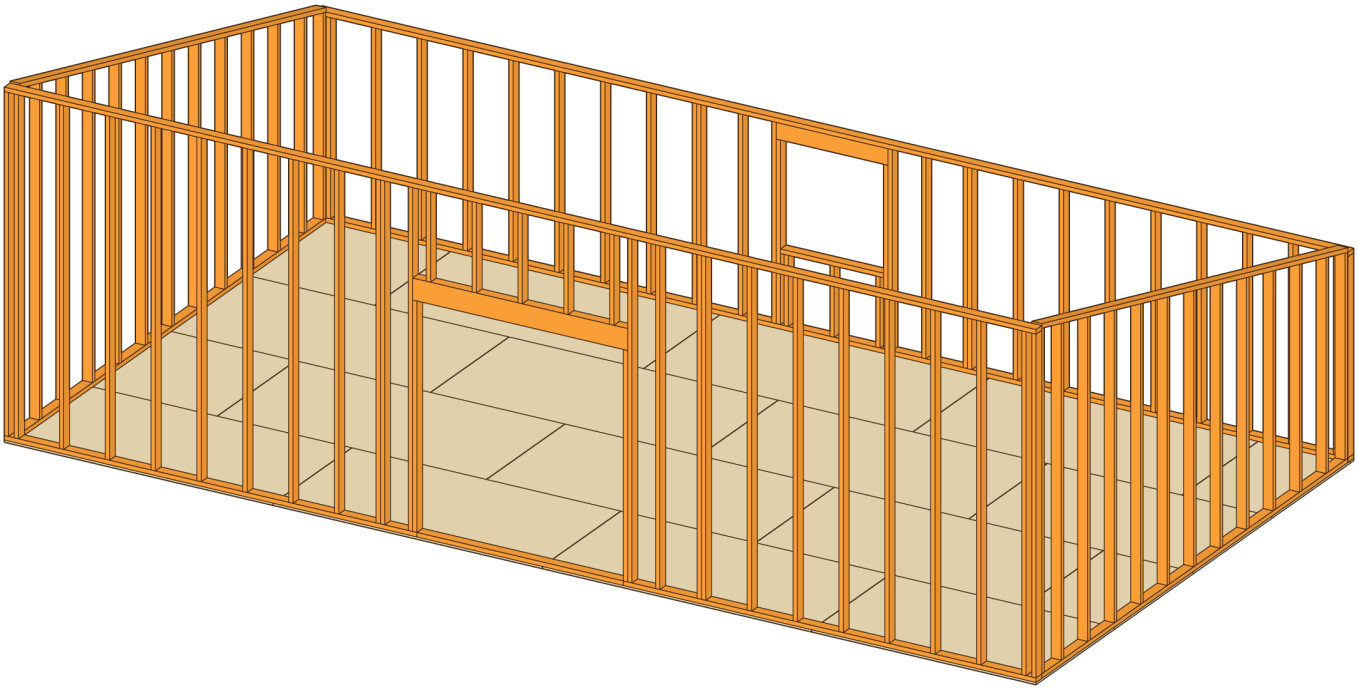



Full 16x30 lean-to plan: material list, cut list, every measurement | $19.99 | 3dshedplans.com/16x30-lean-to-shed-plan/

4 ROOF

The roof is a single slope from the tall front wall down to the low back wall. Cut a pattern 2x10 rafter with a birdsmouth over each wall, set the rafters about 15 5/8 in on center, block between them over the walls, and build the rake overhang on lookout blocks. Then sheath it with OSB and add double felt, drip edge and shingles; the high front edge gets drip edge over the felt.

In the full plan: the pattern rafter with every cut, the rafter layout on the plates, the sheathing map and the shingle courses. www.3dshedplans.com/16x30-lean-to-shed-plan/

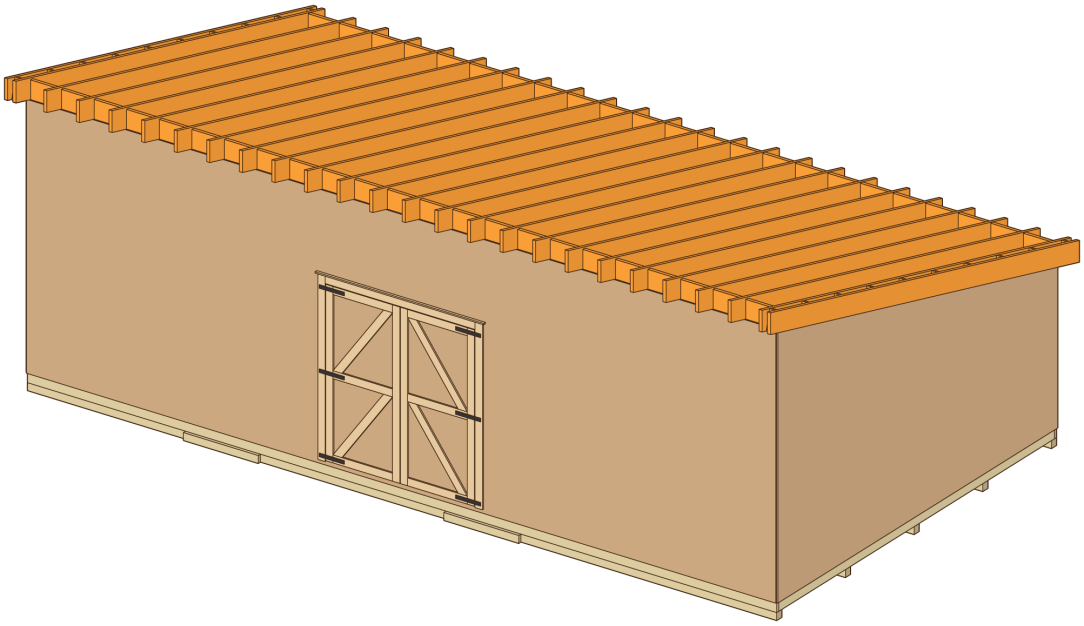

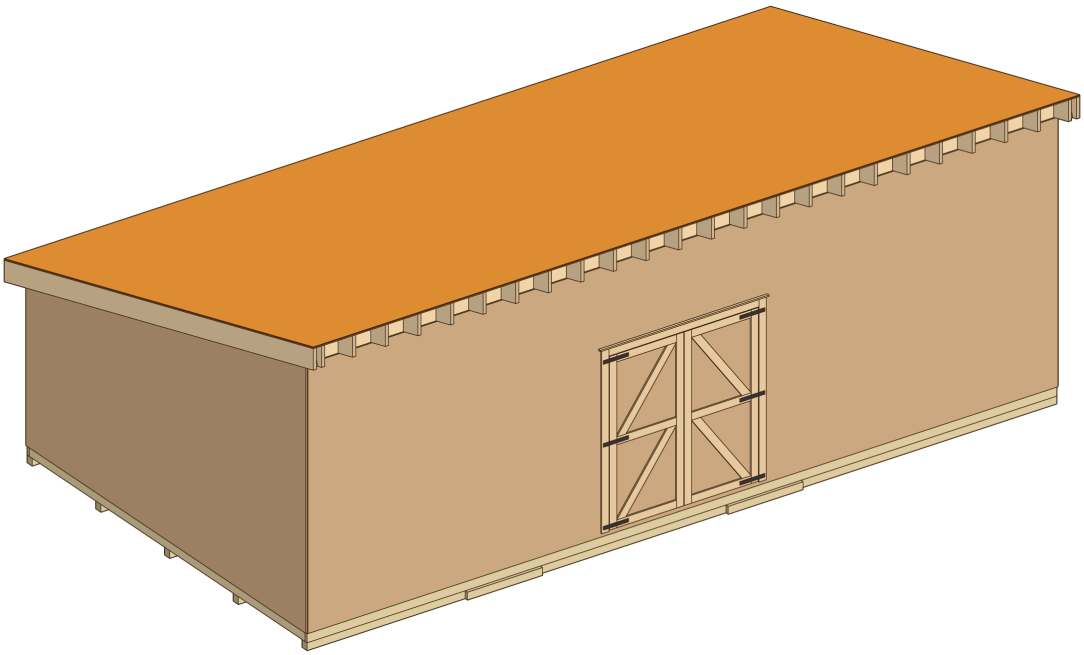



Full 16x30 lean-to plan: material list, cut list, every measurement | $19.99 | 3dshedplans.com/16x30-lean-to-shed-plan/

5 TRIM AND PAINT

Add the corner trim, the casing and drip cap around the door (front, top) and the window casing (back wall, below), then prime and paint or stain.

In the full plan: the casing and trim table, the drip caps and the corner trim, and the ramp's cut sizes and section drawing. www.3dshedplans.com/16x30-lean-to-shed-plan/

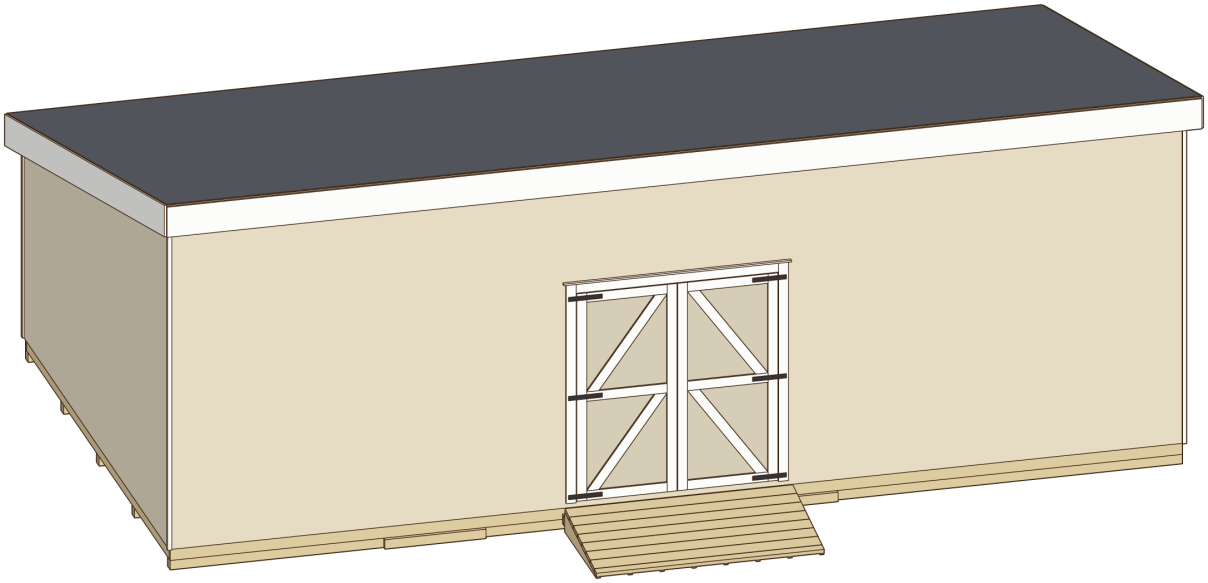

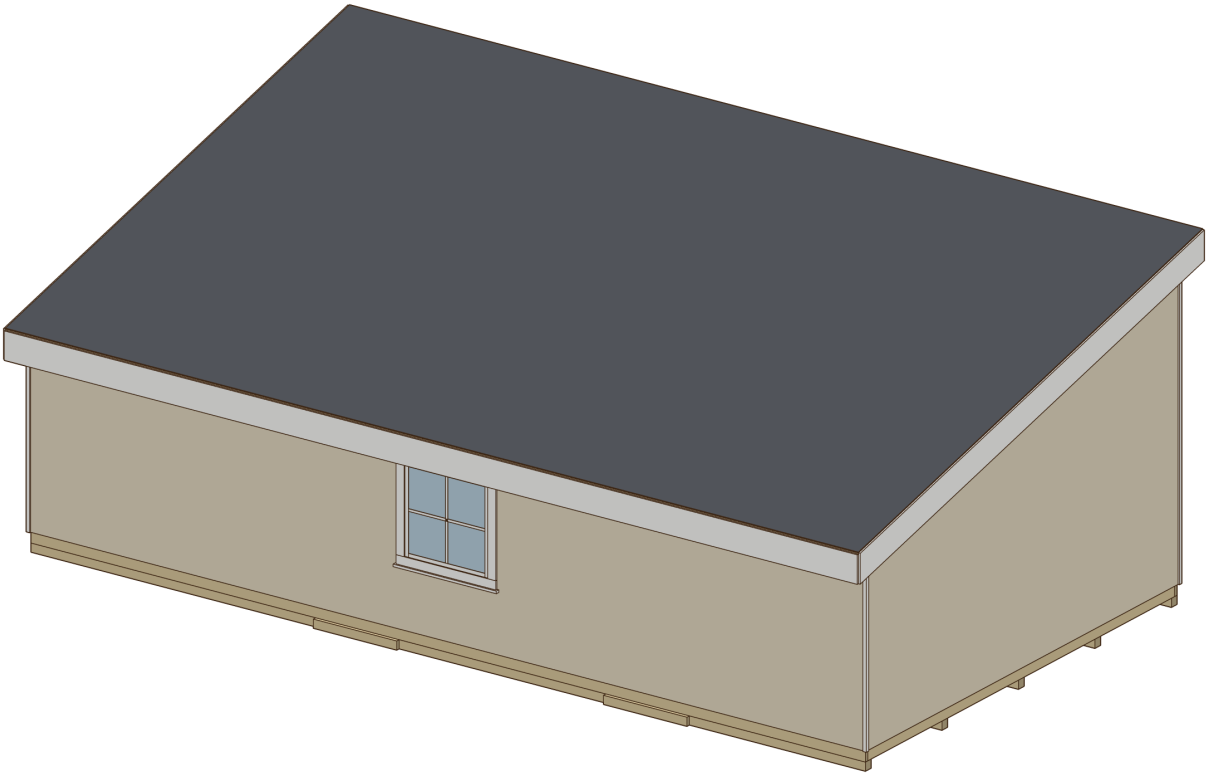

Full 16x30 lean-to plan: material list, cut list, every measurement | $19.99 | 3dshedplans.com/16x30-lean-to-shed-plan/

Ready to build your 16x30 lean-to shed?

	Free preview	Full plan
Overview and build stages	Yes	**Yes**
Material list with quantities	No	**Yes**
Cut list for every part	No	**Yes**
Measurements in every step	Overall sizes	**Every part**
Step-by-step drawings	Preview pages	**75 pages**
Pro tips	No	**Yes**
Price	Free	**$19.99**

Save a weekend of guesswork

75 pages: material list, cut list, every measurement and a drawing for each step, from the skids to the shingles. Instant PDF download.

$19.99 **one time | 30-day money-back guarantee**

Get the full plan

3dshedplans.com/16x30-lean-to-shed-plan/

Not useful? Email support@3dshedplans.com within 30 days for a full refund.

Looking for another size? See every plan: 3dshedplans.com/shed-plans/

Copyright 2026 3DSHEDPLANS.COM. 16x30 lean-to shed plan, free preview. Page 8